

Color From Within

The Fiilex P200 FlexJet reshapes what is possible in LED lighting. This powerful LED light has 8 different color settings, 3000K, 4300K, 5600K, Magenta, Yellow, Aqua, Cyan, and Blue. With the P200 and the Color Blender accessory you can project colorful light wherever you desire. With the Fiber Optic accessory you have the power to bend and shape light anyway you want. This is a creative tool that goes where you go and is limited only by your imagination.



FEATURES

- 200W Equivalent Output - 60W Draw
- Color Temperature Range (8 Color Settings: 3000K, 4300K, 5600K, Magenta, Yellow, Aqua, Cyan, Blue)
- High CRI ≥ 92
- Full Spectrum Light Quality - No Spikes
- Flicker Free at any Frame Rate
- Patented Dense Matrix LED Technology
- Solid State Technology - No Bulbs to Replace
- Compatible with Broadcast Batteries
- Cool to the Touch Housing
- Lightweight, Compact, Easy for Travel



P200 SPECTRUM DATA

Unique in the Fiilex line-up, the P200 Flex Jet has the ability to produce vibrant high quality color. There is no spiking from the full spectrum light, so your colors will look just as amazing to the camera as they do to the eye.

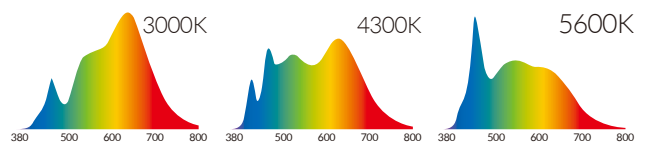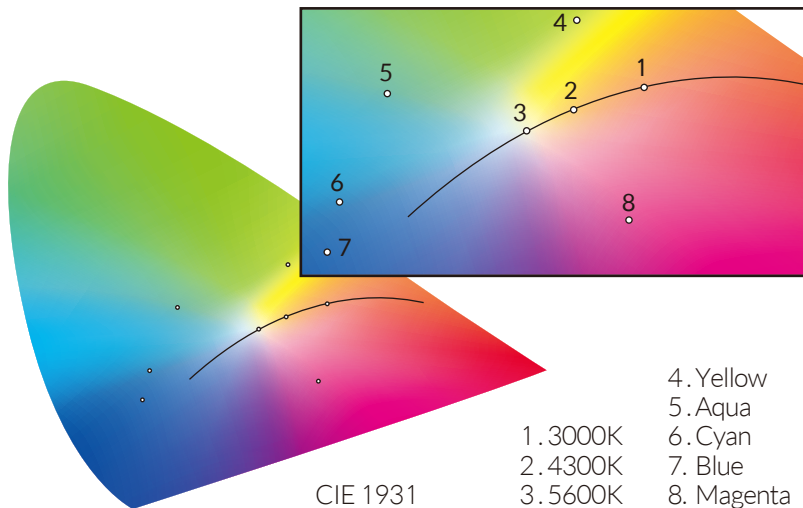


CRI Measurement*	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	CRI Ra**	CRI Extended**	TLCI Results
3000K	95	97	98	94	94	93	98	98	91	90	87	86	92	98	95	96	94	96
4300K	93	95	98	94	94	93	95	94	81	87	91	88	91	98	91	95	92	97
5600K	95	96	98	95	96	95	96	95	81	89	93	91	92	98	92	96	93	98

*Values in this table are typical.

**CRI Ra is the averaged result of R1 to R8, CRI Extended is the averaged value of R1 to R15.

PHOTOMETRIC DATA

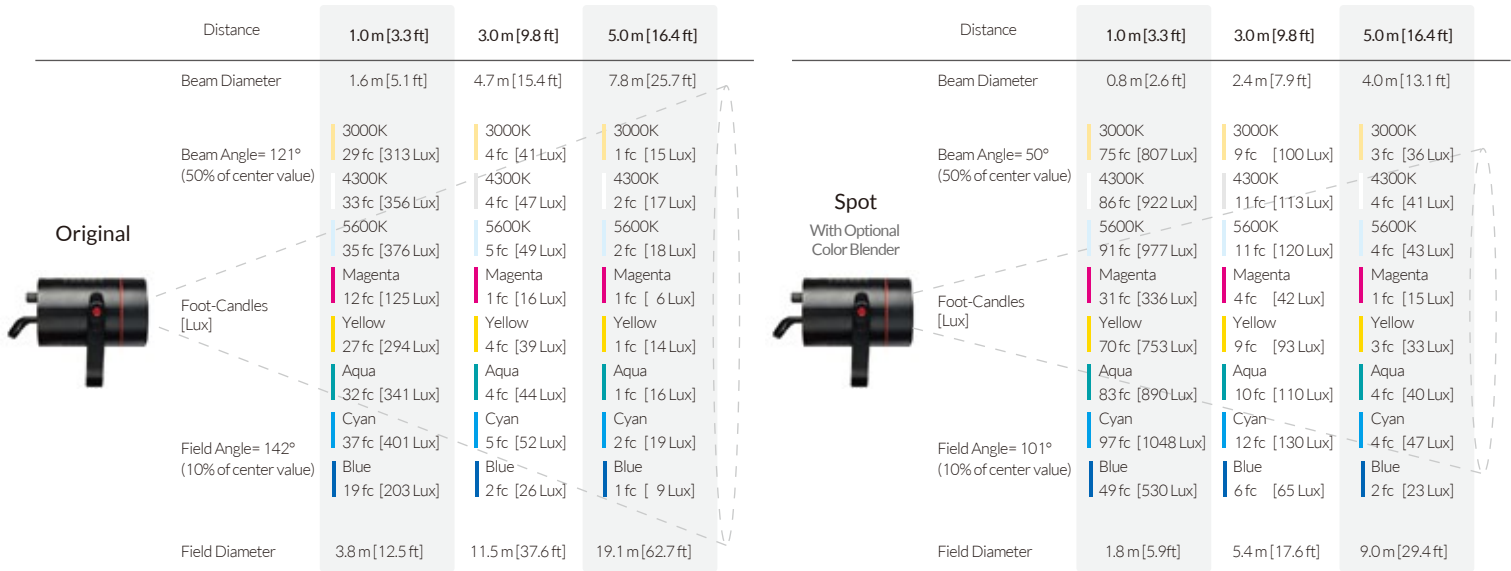

SPECIFICATIONS

Size (without Barndoor)	4" (Diameter) x 7.8" (length)
Weight (Includes Yoke)	2.8lbs / 1.29 kg
LED	Patented Dense Matrix LED Technology
Thermal Design	Advanced Vapor Cooling System
Color Options	3000K / 4300K / 5600K / Magenta / Yellow / Aqua / Cyan / Blue
CRI	≥92
Power Consumption	60W Max.
Power Input	12 to 28V DC
AC Adapter	100-240V AC, 50 / 60Hz (In) / 24V DC , 90W max. (Out)
Operating Temperature	0 - 40° C / 32° - 104°F



OPTIONS

The P200 is available in the K311 and K416 Lighting Kit

A variety of light modifiers and accessories are available for the P200.



K311

2x-P360/1x-P200



K416

P360EX/P180E/P100/P200



Fiber Cap



Fiber Glow



Color Blender



Fiber Adapter



P2Q Converter Kit



Dome Diffuser

Visit www.filex.com for more info.

