

# FL5600 LED Fiberoptic Illuminator With Twinkle Wheel

## PART NUMBER

FL5600	—	<b>MW</b>	—	<b>30</b>	—	<b>H</b>	—	<b>TW</b>	—	<b>PSU</b>
		Device Color		Fiber Port Size		Homogenizer		Twinkle Wheel		
		<b>MW</b> Mixed RGBW		<b>30</b> 30mm		<b>H</b> With homogenizer		<b>NT</b> No Twinkle Wheel <b>TW</b> With Twinkle Wheel		

## SPECIFICATIONS

### FEATURES

UL Listed for Wet locations  
 Stand-alone operable  
 Manual, 0-10V and DMX controllable  
 Mixed Color

### ELECTRICAL

Input Voltage: 24V DC  
 Power Consumption: 120W Max

### OPERATING ENVIRONMENT





Ingress Protection: IP65  
 Exposure: Outdoor  
 Operating Temperature: 0° to 40°C  
 Storage Temperature: -40° to 70°C  
 Airflow: 36 cfm  
 Acoustic Noise: 33 dBA

### MECHANICAL

Material/Finish:  
 Black anodized aluminum, black iron plate  
 Weight: 9 lbs  
 Dimensions: 11.1" x 8.5" x 4.4"  
 DC input cord length: 6 ft

### MOUNTING

OK to mount in any orientation  
 Best orientation is with exhaust vent facing up  
 Keep vents free from obstruction

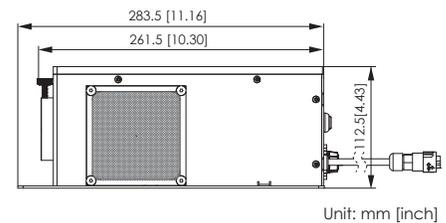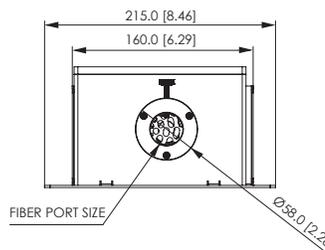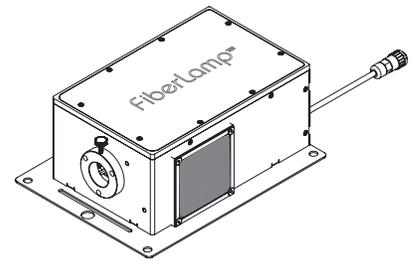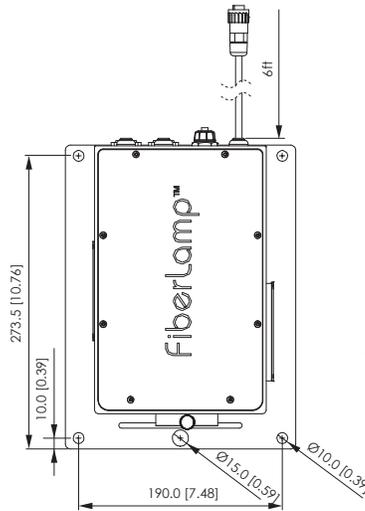

Unit: mm [inch]

