

FL5600 LED Fiberoptic Illuminator No Twinkle Wheel

PART NUMBER

FL5600 — **MW** — **30** — **H** — **NT** — **PSU**

Device Color	Fiber Port Size	Homogenizer	Twinkle Wheel
MW Mixed RGBW	30 30mm	H With homogenizer	NT No Twinkle Wheel

SPECIFICATIONS

FEATURES

UL Listed for Wet locations
Stand-alone operable
Manual, 0-10V and DMX controllable
Mixed Color

ELECTRICAL

Input Voltage: 24V DC
Power Consumption: 120W Max

OPERATING ENVIRONMENT





Ingress Protection: IP65
Exposure: Outdoor
Operating Temperature: 0° to 40°C
Storage Temperature: -40° to 70°C
Airflow: 36 cfm
Acoustic Noise: 33 dBA

MECHANICAL

Material/Finish:
Black anodized aluminum, black iron plate
Weight: 9 lbs
Dimensions: 11.1" x 8.5" x 4.4"
DC input cord length: 6 ft

MOUNTING

OK to mount in any orientation
Best orientation is with exhaust vent facing up
Keep vents free from obstruction

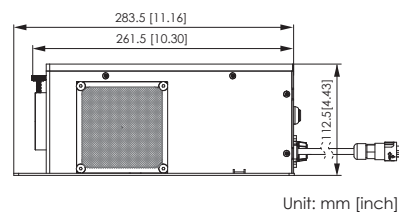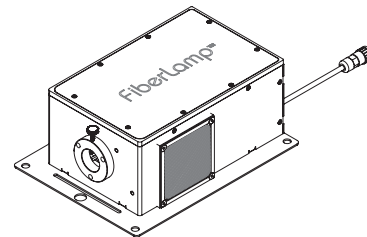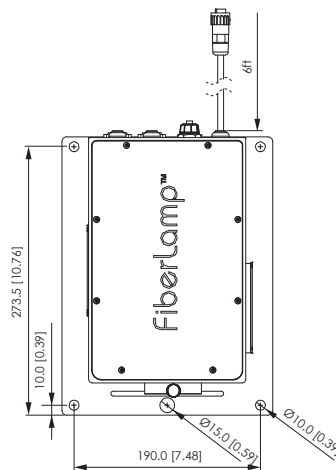

Unit: mm [inch]



070825A