

FL5600 LED Fiberoptic Illuminator With Twinkle Wheel

PART NUMBER

FL5600	—	MW	—	30	—	H	—	TW	—	PSU
		<u>Device Color</u>		<u>Fiber Port Size</u>		<u>Homogenizer</u>		<u>Twinkle Wheel</u>		
		MW Mixed RGBW		30 30mm		H With homogenizer		TW With Twinkle Wheel		

SPECIFICATIONS

FEATURES

- UL Listed for Wet locations
- Stand-alone operable
- Manual, 0-10V and DMX controllable
- Mixed Color

ELECTRICAL

- Input Voltage: 24V DC
- Power Consumption: 120W Max

OPERATING ENVIRONMENT


- Ingress Protection: IP65
- Exposure: Outdoor
- Operating Temperature: 0° to 40°C
- Storage Temperature: -40° to 70°C
- Airflow: 36 cfm
- Acoustic Noise: 33 dBA

MECHANICAL

- Material/Finish: Black anodized aluminum, black iron plate
- Weight: 9 lbs
- Dimensions: 11.1" x 8.5" x 4.4"
- DC input cord length: 6 ft

MOUNTING

- OK to mount in any orientation
- Best orientation is with exhaust vent facing up
- Keep vents free from obstruction

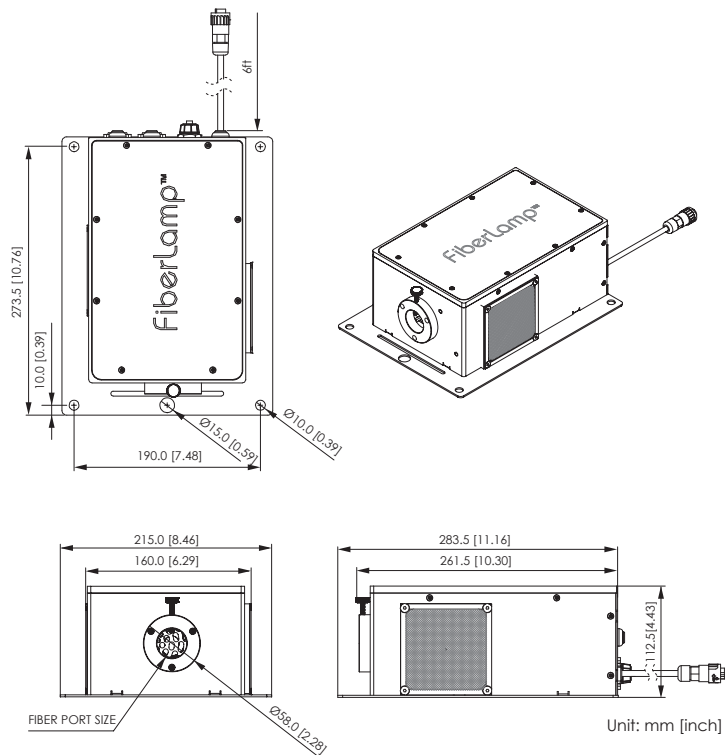

070825A