

PROJECT

QUANTITY

P1L Mini Leko Light (Clamp)

40W LED/ 19° / 36° / 50°



- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 40W Power Draw
- Four Shutters for Precise Framing

ORDERING GUIDE

FLXP1L - - - - CLP - PSV -

Beam Angle

19 19°
36 36°
50 50°

Mode

CLR All Modes
EZ All EZ Modes
RGB RGB Mode Only
CCT Tunable CCT Mode Only
3200 Fixed 3200K
5600 Fixed 5600K

Finish

WH White
BK Black

Mount

CLP Clamp Mount

Power Supply & Control

PSV Power Supply


Plug/Connection

US US 120V
EU EU 220V

SPECIFICATIONS

Beam Angle	19° / 36° / 50°
CRI / TLCI	95/90 typical
Dimming	100% - 0% flicker free
AC Power Draw	40W max
AC Input	100 - 240V AC, 50 - 60Hz
Control	Manual, DMX512
Cooling	Passive Cooling
Acoustic Noise	0 dBA (none)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	7.1lb / 3.2kg
Gobo Size	Diameter: E Size (37.5mm)
	Max Image: 28mm
	Max Thickness: 0.8mm

MECHANICAL FIGURES

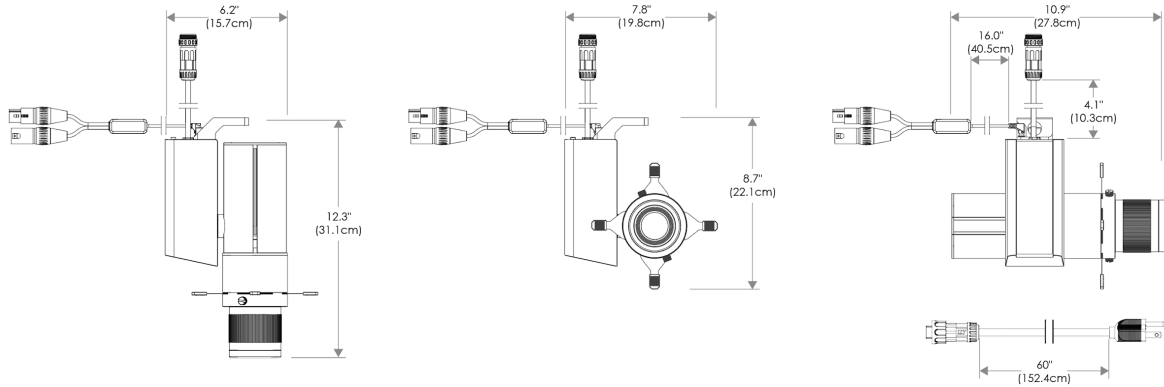

*All -CLP configuration models come with standard DC cables of 16" and AC cables of 5'.



PHOTOMETRIC DATA

50 Degree

Distance		3' (~0.9 m)	5' (~1.5 m)	10' (~3.0 m)
@3200K	fc	159	76	12
	lux	1716	823	128
@5600K	fc	149	71	11
	lux	1605	769	120
Beam Diameter		Ø 2.4' (~0.7m)	Ø 4.1' (~1.2m)	Ø 8.2' (~2.5m)

