

PROJECT

QUANTITY

P3X Spot Light (Clamp)

90W LED/ 60°



- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 90W Power Draw
- Compact (< 8" of Vertical Space)

ORDERING GUIDE

FLXP3X - - - CLP - PSV -

Mode

CLR All Modes
EZ All EZ Modes
RGB RGB Mode Only
CCT Tunable CCT Mode Only
3200 Fixed 3200K
5600 Fixed 5600K

Finish

WH White
BK Black

Mount

CLP Clamp Mount

Power Supply

PSV Power Supply


Plug/Connection

US US 120V
EU EU 220V

SPECIFICATIONS


Beam Angle	60°
CRI / TLCI	95/90 typical
Dimming	100% - 0% flicker free
AC Power Draw	90W max
AC Input	100 - 240V AC, 50 - 60Hz
Remote Control	DMX 512
Cooling	Fan Cooled
Acoustic Noise	19 dBA (Auto Mode)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	3.5lb / 1.6kg
Approved Regulatory Standards	cETLus, FCC, CE, UKCA, RoHS, WEEE

MECHANICAL FIGURES

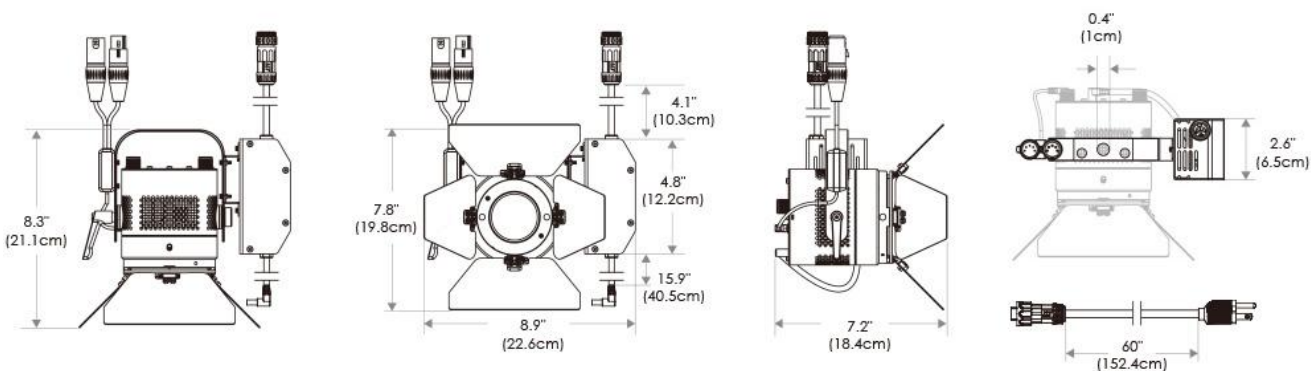

*All -CLP configuration models come with standard DC cables of 16" and AC cables of 5'.

PHOTOMETRIC DATA

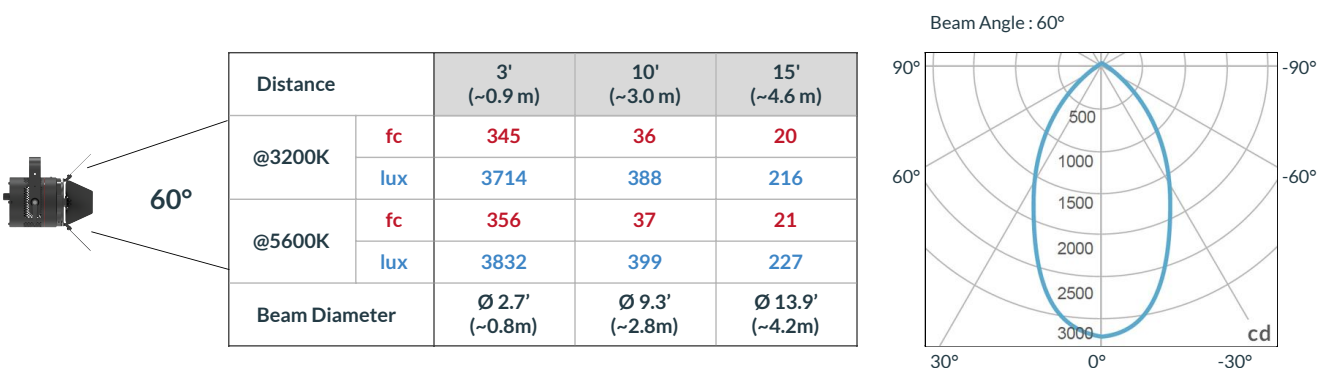

MODE DESCRIPTION

Mode Description	Available Modes
- CLR	All Modes (8 bit and 16 bit)
- EZ	All EZ Modes (8 bit) (EZ CCT / EZ HSI / EZ RGBW / EZ RGB / EZ ICTHS / EZ ICT RGBW / EZ 3200K / EZ 5600K)
- RGB	EZ RGB (8 bit)
- CCT	EZ CCT (8 bit)
- 3200	EZ 3200K (8 bit)
- 5600	EZ 5600K (8 bit)

See Downloads portion of webpage for full DMX profiles

ACCESSORIES

(specify finish by adding -BK or -WH)



6x8 Softbox
FLXP3-6x8SB



Fresnel Lens 20deg
FLXP3CLR-FRNL20



Fresnel Lens 20deg Snoot
FLXP3CLR-SNOOTF20



Honeycomb
TRA006N



Dome Diffuser
FLXP3CLR-DOME15