


PROJECT		QUANTITY	
---------	--	----------	--

# P3F Fresnel Light (Track)

90W LED/ 15°- 45°

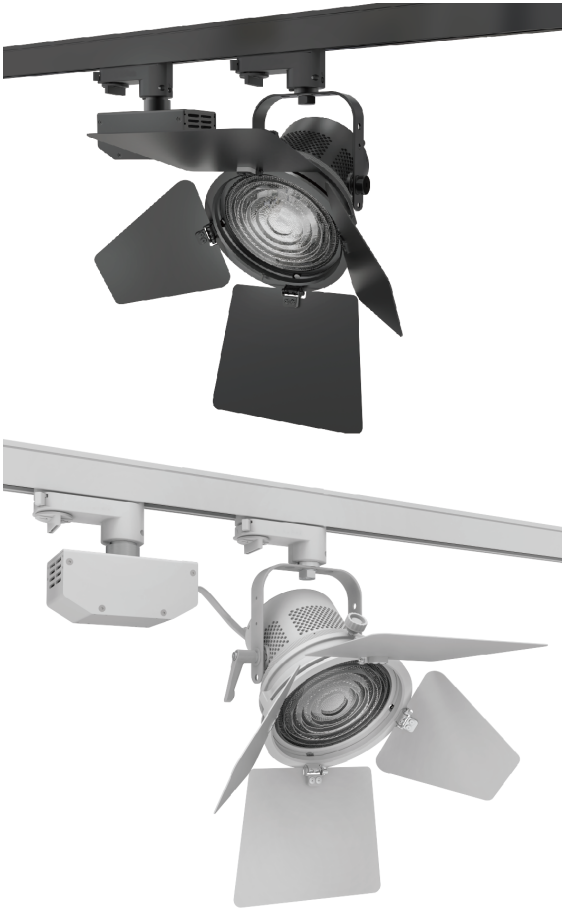

## ORDERING GUIDE

**FLXP3F** -  -  - **TOX** - **PSP** -

<b>Mode</b>					
<b>CLR</b>	All Modes				
<b>EZ</b>	All EZ Modes				
<b>RGB</b>	RGB Mode Only				
<b>CCT</b>	Tunable CCT Mode Only				
<b>3200</b>	Fixed 3200K				
<b>5600</b>	Fixed 5600K				
<b>Finish</b>					
<b>WH</b>	White				
<b>BK</b>	Black				
<b>Mount</b>					
<b>TOX</b>	w/ O-type DMX Track Adapter				
	<small>*Custom Track Adaptors Available</small>				
<b>Power Supply &amp; Control</b>					
<b>PSP</b>	Power Supply w/ Pass-Through DMX				
<b>Plug/Connection</b>					
<b>US</b>	US 120V				
<b>EU</b>	EU 220V				

## SPECIFICATIONS

Beam Angle	15°- 45°
CRI / TLCI	95/90 typical
Dimming	100% - 0% flicker free
AC Power Draw	90W max
AC Input	100 - 240V AC, 50 - 60Hz
Control	Manual, DMX512
Cooling	Fan Cooled
Acoustic Noise	19 dBA (Auto Mode)
Operating Temp.	32 - 104°F (0 - 40°C)
Weight (Fixture + Power Supply)	4.5lb / 2.1kg
Approved Regulatory Standards	cETLus, FCC, CE, UKCA, RoHS, WEEE



- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 90W Power Draw
- Compact (< 8" of Vertical Space)

# MECHANICAL FIGURES





PSP

US

## Flood

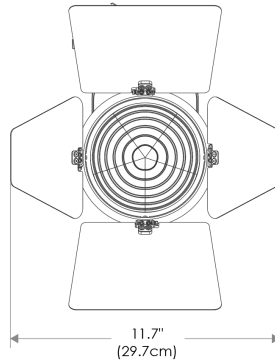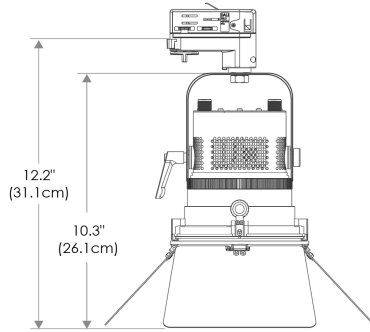



## Focus

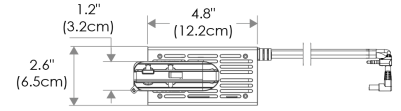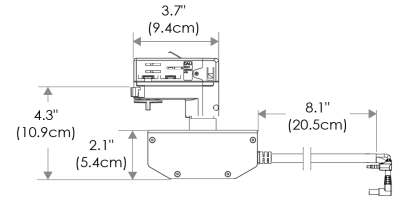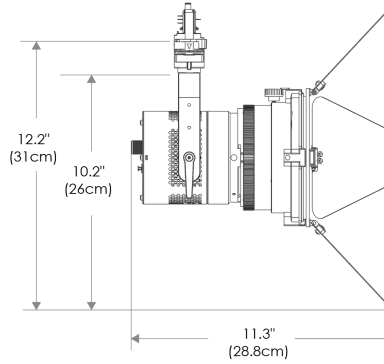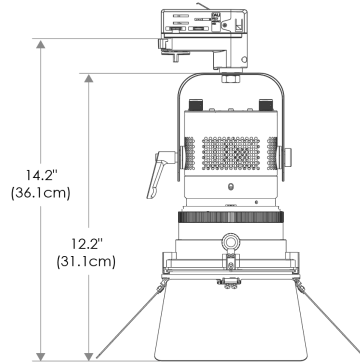





PSP

EU

## Flood

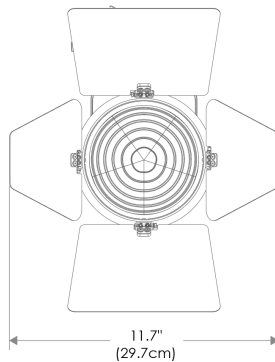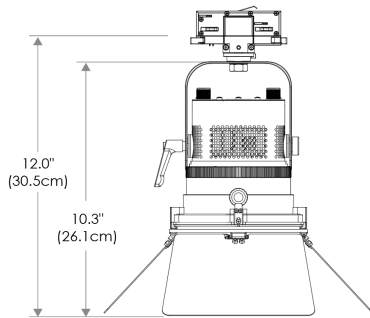


## Focus

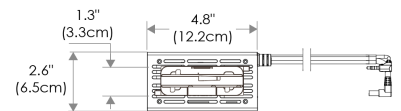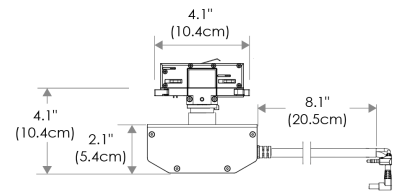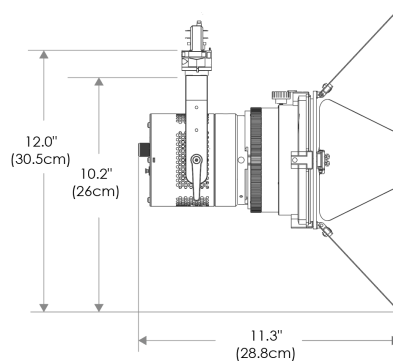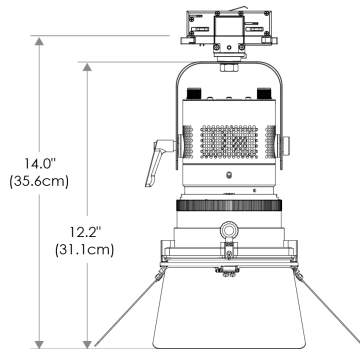


## PHOTOMETRIC DATA


### Focus




Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	2604	241	117
	lux	28027	2591	1257
@5600K	fc	2690	249	121
	lux	28960	2678	1299
Beam Diameter		Ø 0.8' (~0.2m)	Ø 2.6' (~0.8m)	Ø 4.1' (~1.2m)

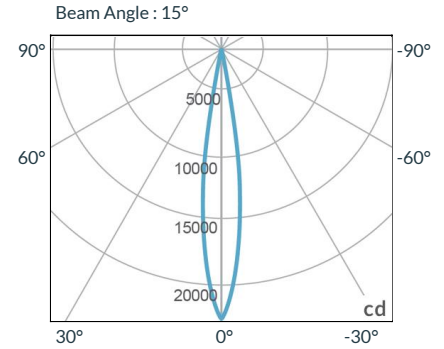

### Flood



Distance		3' (~0.9 m)	10' (~3.0 m)	15' (~4.6 m)
@3200K	fc	546	54	29
	lux	5876	578	314
@5600K	fc	564	55	30
	lux	6071	597	324
Beam Diameter		Ø 2.2' (~0.7m)	Ø 7.4' (~2.3m)	Ø 11.4' (~3.5m)

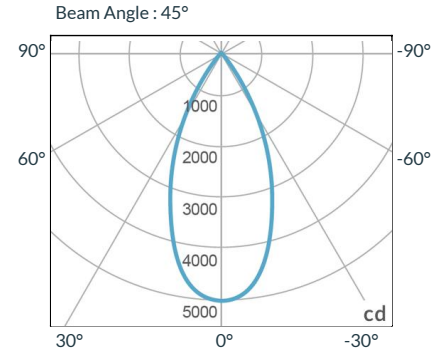

## MODE DESCRIPTION

Mode Description	Available Modes
- CLR	All Modes (8 bit and 16 bit)
- EZ	All EZ Modes (8 bit) (EZ CCT / EZ HSI / EZ RGBW / EZ RGB / EZ ICTHS / EZ ICT RGBW / EZ 3200K / EZ 5600K)
- RGB	EZ RGB (8 bit)
- CCT	EZ CCT (8 bit)
- 3200	EZ 3200K (8 bit)
- 5600	EZ 5600K (8 bit)

See Downloads portion of webpage for full DMX profiles

## COMPATIBLE ACCESSORIES

(specify finish by adding -BK or -WH)




15' Safety Cable  
FLXSAFETYCABLE



Studio Remote Patcher Utility  
CXRPDU



P3F Fresnel Lens 15-45deg  
FLXP3F-FRNL1545



P3F Barndoor 4 Leaf  
FLXP3F-BD4



DMX 6 Channel Controller  
FLXCNTL-DMX6




0-10V to DMX Converter  
KSUSCB1



DALI to DMX Converter  
KSUSCB2

## TILT/ROTATION



\* Tilt/rotation applies to all options.