

P3S Spot Light (Track)

90W LED/ 20°



- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 90W Power Draw
- Compact (< 8" of Vertical Space)

ORDERING GUIDE

FLXP3S - - - **TOX** - **PSP** -

Mode

CLR All Modes
EZ All EZ Modes
RGB RGB Mode Only
CCT Tunable CCT Mode Only
3200 Fixed 3200K
5600 Fixed 5600K

Finish

WH White
BK Black

Mount

TOX w/ O-type DMX Track Adapter
 *Custom Track Adaptors Available

Power Supply & Control

PSP Power Supply w/ Pass-Through DMX

Plug/Connection

US US 120V
EU EU 220V


SPECIFICATIONS

| | |
|------------------------------------|-----------------------------------|
| Beam Angle | 20° |
| CRI / TLCI | 95/90 typical |
| Dimming | 100% - 0% flicker free |
| AC Power Draw | 90W max |
| AC Input | 100 - 240V AC, 50 - 60Hz |
| Control | Manual, DMX512 |
| Cooling | Fan Cooled |
| Acoustic Noise | 19 dBA (Auto Mode) |
| Operating Temp. | 32 - 104°F (0 - 40°C) |
| Weight (Fixture + Power Supply) | 3.4lb / 1.6kg |
| Approved Regulatory Standards | cETLus, FCC, CE, UKCA, RoHS, WEEE |

MECHANICAL FIGURES


PSP

US

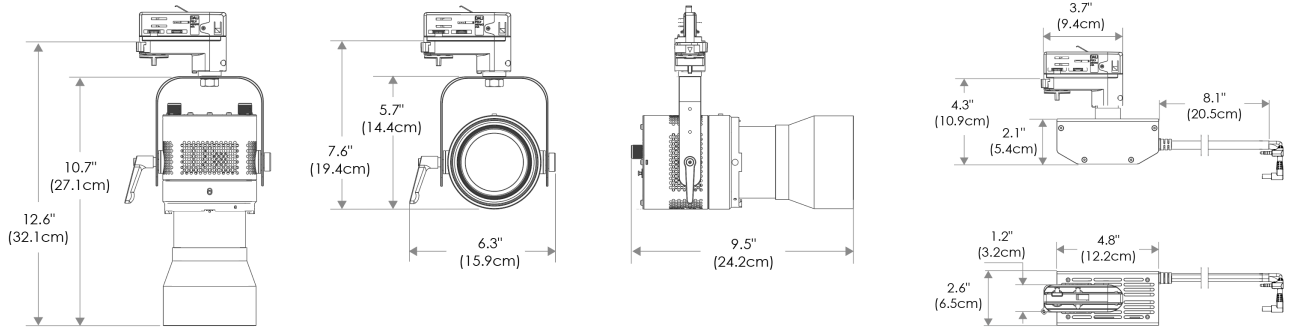


PSP

EU

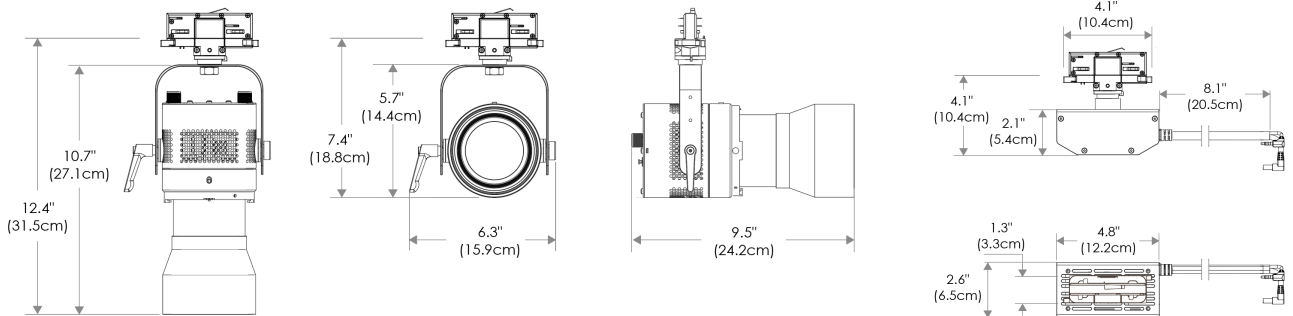


TILT/ROTATION

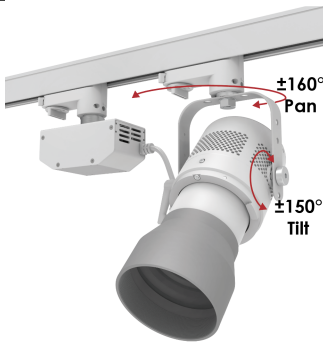

* Tilt/rotation applies to all options.

PHOTOMETRIC DATA

| Distance | | 3' (~0.9 m) | 10' (~3.0 m) | 15' (~4.6 m) |
|---------------|-----|-------------------|-------------------|-------------------|
| @3200K | fc | 1267 | 106 | 53 |
| | lux | 13638 | 1141 | 571 |
| @5600K | fc | 1309 | 110 | 55 |
| | lux | 14090 | 1185 | 593 |
| Beam Diameter | | Ø 1.0' (~0.3m) | Ø 3.5' (~1.1m) | Ø 5.3' (~1.6m) |

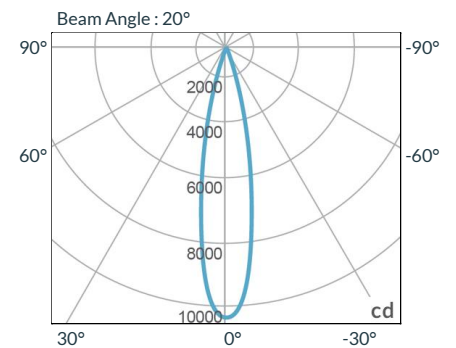

MODE DESCRIPTION

| Mode Description | Available Modes |
|------------------|---|
| - CLR | All Modes (8 bit and 16 bit) |
| - EZ | All EZ Modes (8 bit) (EZ CCT / EZ HSI / EZ RGBW / EZ RGB / EZ ICTHS / EZ ICT RGBW / EZ 3200K / EZ 5600K) |
| - RGB | EZ RGB (8 bit) |
| - CCT | EZ CCT (8 bit) |
| - 3200 | EZ 3200K (8 bit) |
| - 5600 | EZ 5600K (8 bit) |

See Downloads portion of webpage for full DMX profiles

COMPATIBLE ACCESSORIES

(specify finish by adding -BK or -WH)



15' Safety Cable
FLXSAFETYCABLE



Studio Remote Patcher Utility
CXRPU



Fresnel Lens 20deg
FLXP3CLR-FRNL20



Fresnel Lens 20deg Shoot
FLXP3CLR-SNOOTF20



DMX 6 Channel Controller
FLXCNTL-DMX6



0-10V to DMX Converter
KSUSCB1



DALI to DMX Converter
KSUSCB2