


P3F Fresnel Light (Track)

90W LED/ 15°- 45°

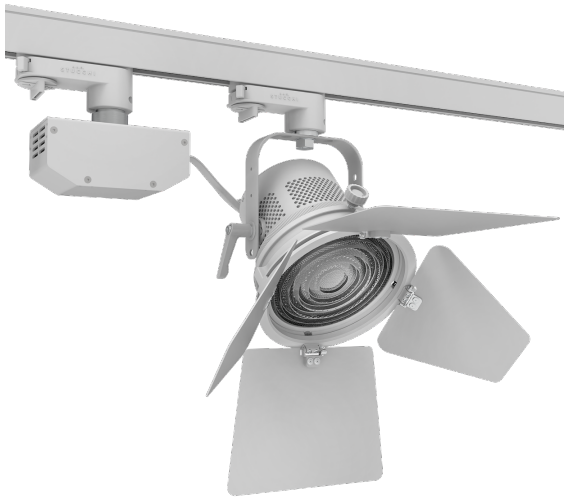

- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 90W Power Draw
- Compact (< 8" of Vertical Space)

ORDERING GUIDE

FLXP3F - - - - **PSP** -

Mode

CLR All Modes
EZ All EZ Modes
RGB RGB Mode Only
CCT Tunable CCT Mode Only
3200 Fixed 3200K
5600 Fixed 5600K

Finish

WH White
BK Black

Mount

TOX w/ O-type DMX Track Adapter
TEX w/ E-type DMX Track Adapter (Legacy product)

Power Supply & Control

PSP Power Supply w/ Pass-Through DMX


Plug/Connection

US US 120V
EU EU 220V

SPECIFICATIONS

| | |
|------------------------------------|---|
| Beam Angle | 15°- 45° |
| CRI / TLCI | 95/90 typical (in CCT Mode of 2800K-6500K) |
| Dimming | 100% - 0% flicker free |
| Power Draw | 90W max |
| AC Input | 100 - 240V AC, 50 - 60Hz |
| Remote Control | DMX 512 |
| Cooling | Fan Cooled |
| Acoustic Noise | 23 dBA |
| Operating Temp. | 32 - 104°F (0 - 40°C) |
| Weight (Fixture + Power Supply) | 4.5lb / 2.1kg |

MECHANICAL FIGURES

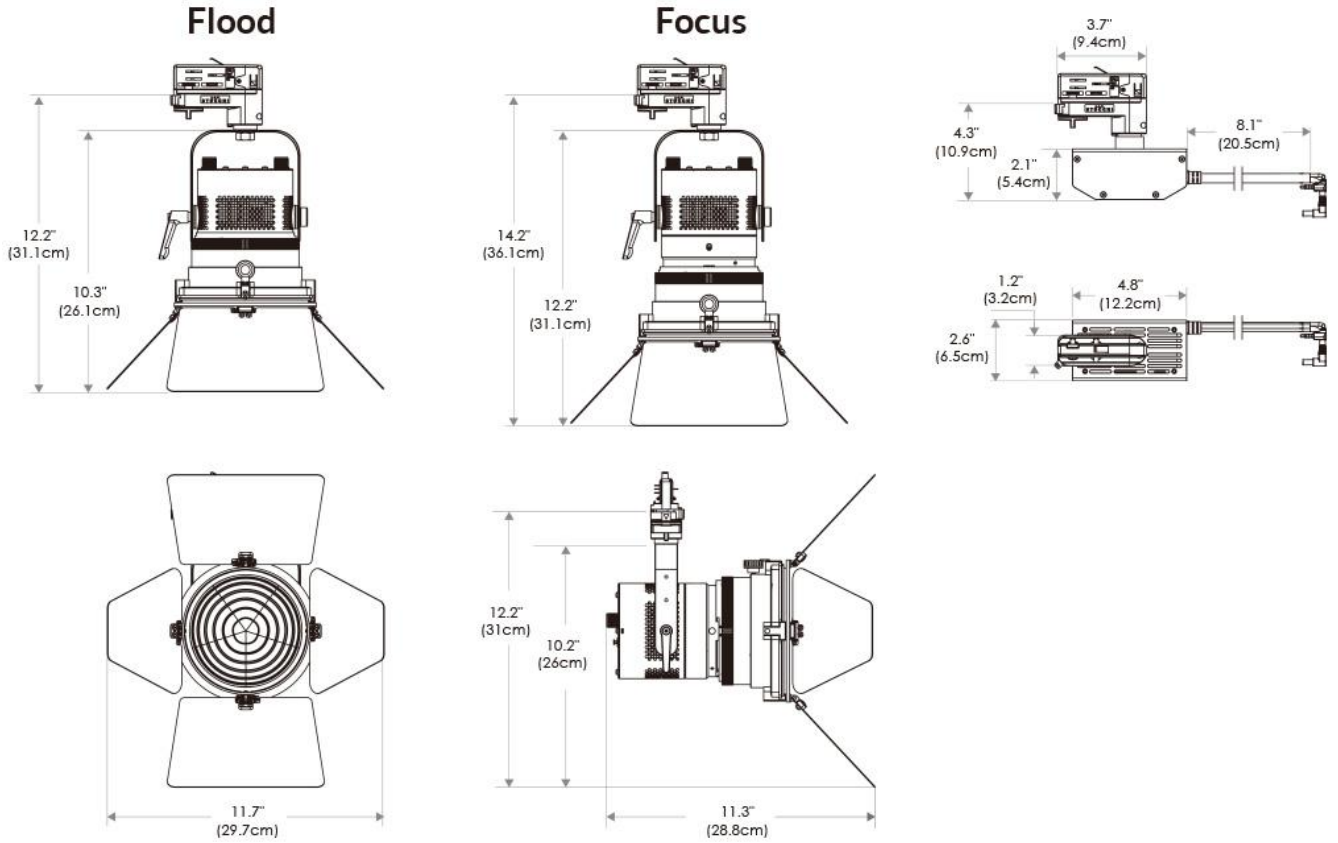


PHOTOMETRIC DATA

Focus

| Distance | | 3' (~0.9 m) | 10' (~3.0 m) | 15' (~4.6 m) |
|---------------|-----|-------------------|-------------------|--------------------|
| @3200K | fc | 2522 | 237 | 119 |
| | lux | 27147 | 2552 | 1281 |
| @5600K | fc | 2606 | 245 | 123 |
| | lux | 28051 | 2638 | 1324 |
| Beam Diameter | | Ø 2.3' (~0.2m) | Ø 7.5' (~0.8m) | Ø 11.3' (~1.2m) |


Beam Angle : 15°

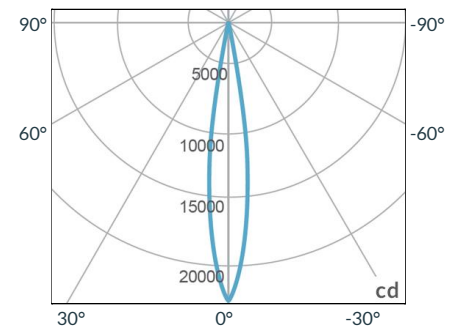

Flood

| Distance | | 3' (~0.9 m) | 10' (~3.0 m) | 15' (~4.6 m) |
|---------------|-----|-------------------|-------------------|--------------------|
| @3200K | fc | 529 | 53 | 30 |
| | lux | 5695 | 571 | 323 |
| @5600K | fc | 564 | 55 | 31 |
| | lux | 6071 | 593 | 334 |
| Beam Diameter | | Ø 2.3' (~0.7m) | Ø 8.6' (~2.6m) | Ø 11.3' (~3.4m) |

Beam Angle : 45°

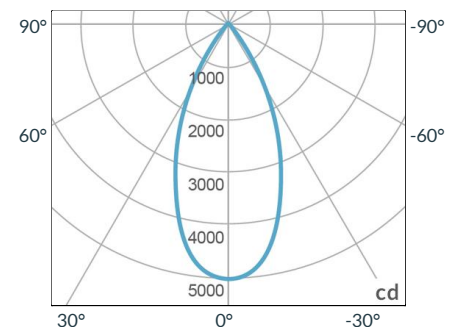

MODE DESCRIPTION

| Mode Description | Available Modes |
|------------------|--|
| - CLR | All Modes (8 bit and 16 bit) |
| - EZ | All EZ Modes (8 bit) (EZ CCT / EZ HSI / EZ RGBW / EZ RGB / EZ ICTHS / EZ ICT RGBW / EZ 3200K / EZ 5600K) |
| - RGB | EZ RGB (8 bit) |
| - CCT | EZ CCT (8 bit) |
| - 3200 | EZ 3200K (8 bit) |
| - 5600 | EZ 5600K (8 bit) |

See Downloads portion of webpage for full DMX profiles